



CR2016 MFR

3V Lithium Battery


Technical Data Sheet

Specifications





| | |
|------------------------------|-----------------------|
| Chemical System | Li / MnO ₂ |
| Nominal Voltage | 3 V |
| Rated Capacity | 90 mAh |
| Standard Discharge Current | 0.2 mA |
| Max. Cont. Discharge Current | 3.0 mA |
| Average Weight | 1.7 g |
| Temperature Range | -30 - +60 °C |
| Self Discharge at 23°C | < 1% / year |

Dimensions

(According to IEC 60086)



Performance

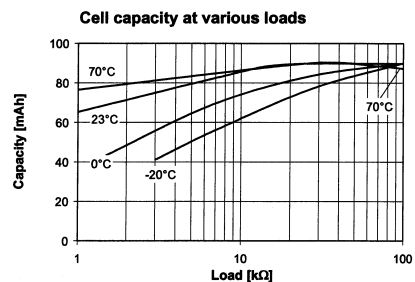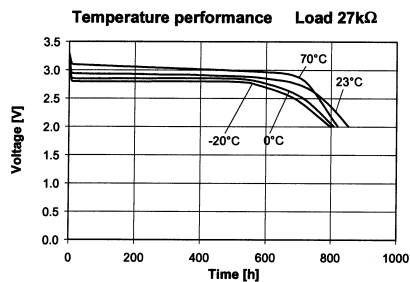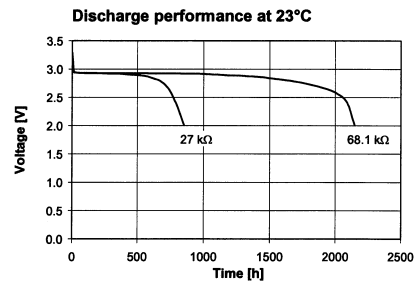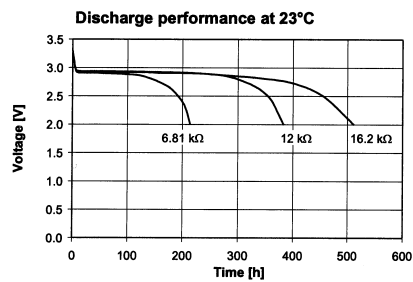

Information and contents in this data sheet are for reference purpose only. They do not constitute any warranty or representation and are subject to change without notice. For most current information and further details, please contact your Rayovac representative.

Rayovac Europe Ltd
Stephenson Estate District 12,
Washington, Tyne and Wear
NE37 3HW, UK

Tel. +44 (0) 191 419 6015
Fax. +44 (0) 191 419 6153

Rayovac.Micropower@uk.spectrumbrands.com
www.rayovac.eu

